


EIH11-SWA Industrial PC

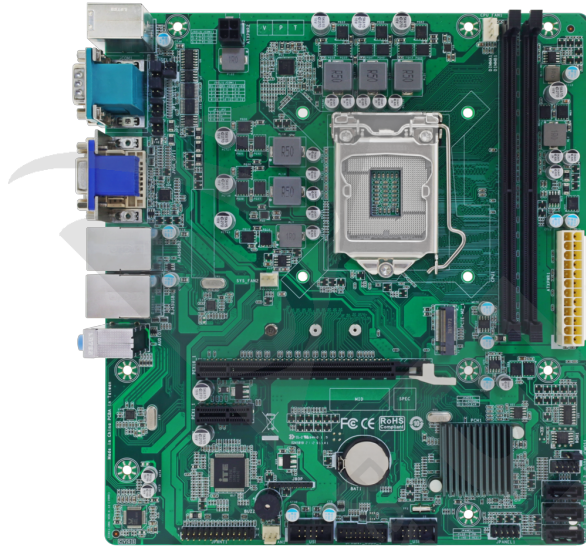

- Support Intel Core i7/i5/i3 processor (LGA1151) with Intel H110 chipset, TDP: 65W
- Support display output : VGA/DVI-I
- Support 2 x DDR4 2400 MHz LONG-DIMM, up to 32GB max
- 2 x RTL8111H LAN
- 6 x USB2.0 & 4 x USB3.0
- 2 x RS232
- 3 x SATAIII
- 1x M.2 M KEY socket, support SATA SSD
- 1 x PCIe16 slot
- 1 x PCIe1 slot
- Support 0 ~ 60 degree C operating temperature
- Power Supply: ATX power input

Specification

CPU SUPPORT	Socket 1151 for Intel® Core i5 / i3 / Pentium / Celeron processor
CHIPSET	Intel H110
MEMORY	2 x DDR4 2400 MHz Long DIMM slot
EXPANSION SLOT	1 x PCI-E x16 Slot 1 x PCI-Ex1 Slot 1 x M.2 M key 2242/2260/2280 slot for SATA SSD
GRAPHICS	1 x DVI-D, up to 1920 x 1200 @60 Hz 1 x VGA, up to 1920x1200 @60Hz
AUDIO	Realtek ALC897 HD Audio
GbE	2 x Realtek RTL8111H - Integrated 10/100/1000 Transceiver
LAN	2 x Gigabit Ethernet
SUPER I/O CHIP	ITE IT8625E
REAR I/O	1 x PS/2 Keyboard 4 x USB 2.0 2 x RS-232 (DB9 connector) 2 x LAN 1 x Audio jack Line in/Line-out / Mic in 2 x USB 3.0 1 x DVI-I 1 x VGA

INTERNAL I/O	1 x Front Panel Header 1 x DIO(GPIO) 8 bit (4-In, 4-Out) Header 1 x USB 3.0 Header (support 2 devices) 1 x Buzzer 3 x SATAII 1 x CPU FAN Header 2 x System FAN Header 1 x Clear CMOS header 1 x 2*2 pin 12V power connector 1 x USB 2.0 Header (support 2 devices) 1 x 24pin ATX power
DIMENSION	244 x 220 x 1.5mm (D x W x H)
ENVIRONMENT	Working Temperature 0 ~ 60°C Relative Humidity 5% ~ 90%
OS SUPPORT	Support Windows 7/8.1 Support Linux Support Ubuntu

*The specification and pictures are subject to change without notice and the package contents may differ by area or your motherboard version!



Beyond Better, Racing to the Future. BIOSTAR®